

FIREPRO CENTABUILD

HEAD OFFICE: AUCKLAND (09) 579 0367

CHRISTCHURCH (03) 379 9364

www.firepro.co.nz sales@firepro.co.nz



B350, B351 DATASHEET – MAR 17

Product specifications can change. Contact us to ensure you have our latest datasheet

FIREPRO B350/B351

WALL ACCESS FIRE RATED HATCHES

- Provide access through fire rated walls.
- For plaster board or concrete walls
- Simple to Install.
- Big range of Sizes.
- B350: -/120/90 Fire Rating.
- B351: -/60/60 Fire Rating.

FIRE TESTING AND APPROVALS

B350 – 120 mins integrity and 114 minute insulation (FRR -/120/90)

B351 FRR -/60/60

When installed in walls of appropriate fire rating.

SIZES

B350 Stock Sizes are: (all measurements are nominal)

Dimension A	Dimension B	Dimension C
300 x 300mm	= A Plus 40mm	= A Less 100mm
510 x 510mm	"	"
600 x 600mm	"	"
800 x 600mm	"	"
920 x 620mm	"	"

Special sizes B350 and B351

Dimension 'D' can be increased for extra thick walls. Specify B350 or B351 "Special" and Dimension 'D' required.

B351 Stock Sizes are: (all measurements are nominal)

Dimension A	Dimension B	Dimension C
300 x 300mm	= A Plus 40mm	A Less 40mm
400 x 400mm	"	"
510 x 510mm	"	"
710 x 510mm	"	"
600 x 600mm	"	"
800 x 600mm	"	"
900 x 600mm	"	"

INSTALLATION


Trim opening to suit overall hatch dimensions with minimum clearance. Fit hatch and plumb up. Screw fix frame with screws provided to holes already drilled using a No. 2 Phillips cross recess bit - do not overdrive.

Screws provided are for timber or steel framed walls. For concrete wall installation replace with appropriate steel fastenings.

Seal trimming gap around hatch and framing with Firepro intumescent fire sealant to both sides 10mm deep. Any gaps wider than 20mm will need additional sealant depth.

Refer to sealant data sheet.

Fit 90 degree Slim Angle provided and leave ready for stopping and painting.

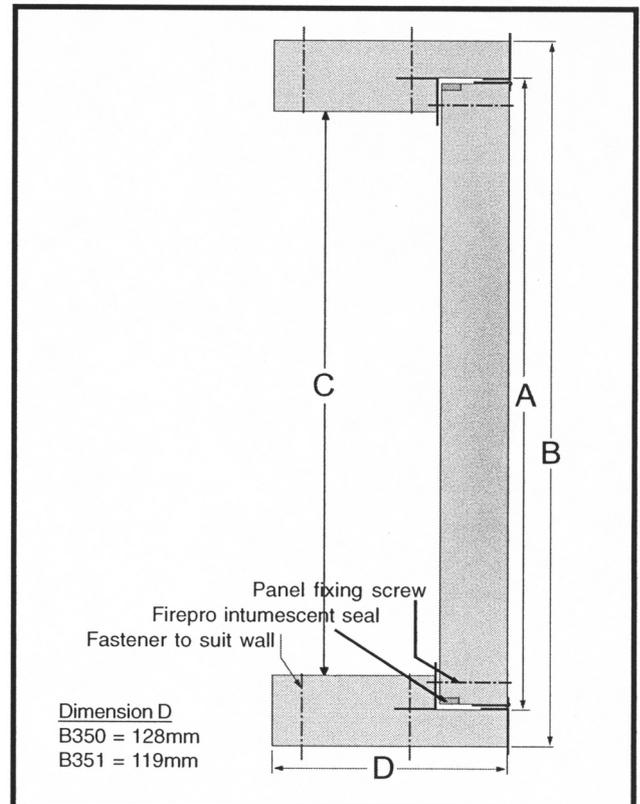

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. If used beyond the situations detailed on this datasheet we advise confirming their suitability before installation. All dimensions are nominal.

We reserve the right to make changes or to withdraw designs and products without notice.